



# ClearWalk Transparent Anti-Slip Media

## Applications:

Can be used indoor on almost every surfaces such as tiles, marble, concrete, linoleum, porcelain, vinyl, POP—POS Supermarkets, shopping malls, Fast food, Pharmacies, Museums, Showers, bathtubs, wet areas—even inside pools and Sauna.

## Properties

### Technical information:

Rolls: 51"x30' & 51"x100' (1.3m x 9.14m & 1.3m x 30m)  
Product: White Textured vinyl (18mil / 0.457mm)  
Adhesive: clear acrylic adhesive (2mil / 0.051mm)  
Paper release liner (7mil / 0.178mm)

### Peel Adhesion to:

Stainless Steel: 15 minute dwell, 55oz/in (66N/100mm)  
24 hour dwell, 75oz/in(82N/100mm)  
Powder coated  
surfaces \*: 15 minute dwell, 40oz/in (44N/100mm)  
24 hour dwell, 55oz/in (60N/100mm)  
Polyethylene: 15 minute dwell, 20oz/in (22N/100mm)  
24 hour dwell, 25oz/in (27N/100mm)

### Coefficient of Friction: (Kinetic) Dry / Wet

Rubber: 0,9 / 1,0  
Leather: 0,3 / 1,0

### Minimum application temperature:

+50°F to +122°F (+10°C / +50°F)\*\*

### Flammability:

to be tested

### Printing Method:

CatWalk is compatible with digital or silk-screen solvent, eco-solvent latex, and UV-Curable inks.

### Durability:

ClearWalk will last up to 3 months for indoor or wet area applications. The durability depends on proper application, the condition of the surface and the frequency of usage.

### Storage:

It is recommended to store the product in closed packaging at a temperature of +60°F to +85°F (+15°C to +30°C) and humidity range of 45% to 60%. The product has a shelf life of 24 months.

### Chemical Properties:

#### Solvent Resistance

Water	R
10% Salt Water	R
Bleach	R
Trichloroethylene	NR
1% Sodium Hydroxide	I
Unleaded Gasoline	R
Diesel Fuel	R
Hydraulic Fluid	R
50% Antifreeze in water	R
MEK	NR
Mineral Spirits	R
99% IPA	R

R = recommended for non continuous immersion;

NR = not recommended

I = recommended for intermittent exposure only

\* Color and lot variances of coated surfaces including paints, powder coatings, lacquers, stains, and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface.

\*\*At temperatures below +50°F (+10°C) the surface has to be pre-treated with a gas burner.

**To order call:**  
**(800)552-9427**  
**www.qmls.com**  
**info@qmls.com**  
**fax (203)281-6451**





# ClearWalk Transparent Anti-Slip Media

ClearWalk can be used for short- and medium-term applications. The film consists of a dimensionally stable translucent film with a textured, non-slip surface. The reverse side is coated with a pressure sensitive adhesive, which can be applied indoors on various surfaces and remains easily removable, without residue, even after long use. ClearWalk provides an extremely secure, slip-resistant and chemical resistance surface. Moreover, the quick and easily portable product is extremely foot friendly. The waterproof adhesive and associated durability of the film guarantee versatile usability. ClearWalk is ASTM D-2047 certified and meets the Euro-Norm as DIN/EN.

## CatWalk

Catalog #	Size
AAFLOOR 01-C	54 x 100
AAFLOOR 01-C-10	54 x 30
AAFLOOR 01-C-3	25 x 10

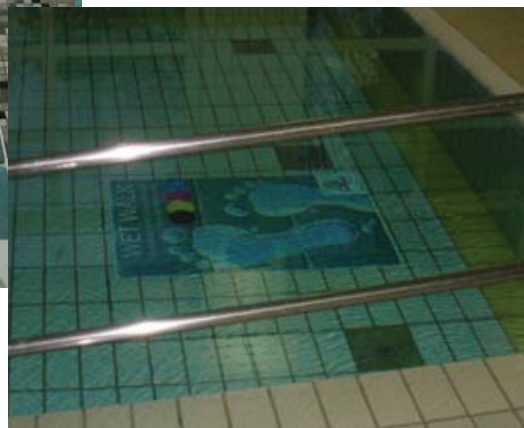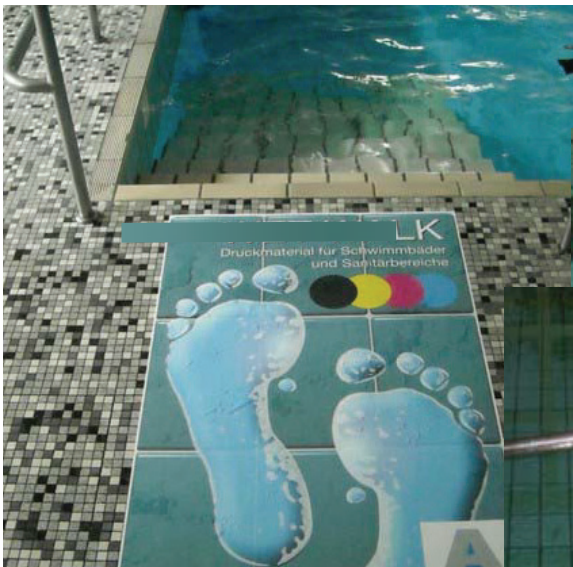

Information provided here is based on research and is believed to be reliable as of printing date. This information does not constitute a warranty. All material should be tested by purchaser to determine final suitability. Quality will not be held responsible for customers end use of product. Quality is available for directions and advice as to proper use and application of our products.

To order call:  
(800)552-9427  
[www.qmls.com](http://www.qmls.com)  
[info@qmls.com](mailto:info@qmls.com)  
fax (203)281-6451