



QUALITY
MEDIA AND LAMINATING SOLUTIONS

DreamScape® Wallcovering




Bring your design to life with IMPACT & DAZZLE.

TEXTURED WALL MEDIA

specially developed and optically tuned for digital printing on wide-format solvent, eco-solvent, UV-Curable and Latex printers



REACH NEW CUSTOMERS! GET INTO THIS FAST GROWING MARKET!

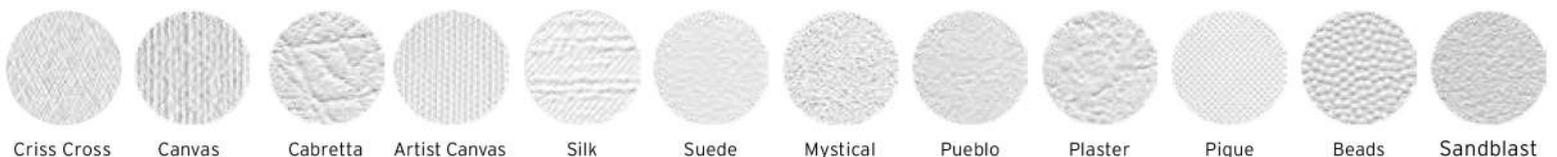

Criss Cross

Canvas

Cabretta

Artist Canvas

Silk

Suede

Mystical

Pueblo

Plaster

Pique

Beads

Sandblast



DreamScape® Wallcovering

- High performance strippable commercial grade Type II wallcovering featuring “Easy up, Easy down” system
- Specially designed for high volume digital output
- Available in widths of 54”, 60”, 75” and lengths of 75’, 150’, and 300’ to fit a wide range of applications
- Exceeds US, Canadian and European Flame and Smoke Requirements. Tested and approved using off the shelf available adhesives
- Meets all CCCW 408D Mildew and Fungal Resistance for wallcovering based on ASTM G21 testing mounting and commercially available adhesives
- Special bulk skid packaging for large volume orders; easier to use, less packaging waste
- Self Extinguishing Technology
- NO ROLL SPLICES!
- Packaging in heavy duty reusable tubes
- Formulated without Lead and Cadmium
- NEW! Now made with LOW VOC vinyl. Tested per CA 1350 air quality standards.
- WA certified NSF 342 Sustainability Standard



Restaurant/Ceiling Installation on Luster



Restaurant Chain/Wallcoverings on Suede



Restaurant/Wall & ceiling coverings on Artist Canvas



Office/Wallcovering on Mystical



Retail/Columns, Soffits, & Wallcoverings on Suede

PRODUCT PACKAGING

Each roll is meticulously packaged in a re-usable heavy duty tube
 (No flat spots, no creases, no splices)
 STD Lengths: 75’, 150’, 300’
 STD Widths: 54”, 60”, 75” (+/- 1/8”)
 Core Diameter: 3 inches i.d. Heavy-Duty
 *Custom lengths and widths available on request

PHYSICAL PROPERTIES

Product Weight: 20 oz. per lineal yd., (13oz. per sq. yd.)
 Vinyl Weight: 17 oz. per lineal yd.
 Fabric Weight: 3 oz. per lineal yd.
 Thickness: 0.015 to 0.030 in.
 *depending on texture
 Fabric: Poly-Cotton Onaburg or Polyester Nonwoven
 *depending on texture

BREAKING STRENGTHS, LBS. FORCE

Machine Direction-warp:
 *Exceeds Type II minimum of 50 lbs.
 Cross Machine Direction-fill:
 *Exceeds Type II minimum of 55 lbs.

TEARING STRENGTH, SCALE

Machine Direction-warp:
 *Exceeds Type II minimum of 25lbs.
 Cross Machine Direction-fill:
 *Exceeds Type II minimum of 25 lbs.

COLD CRACK RESISTANCE @ 20°F

No change

HEAT AGING (7 DAYS @ 158°F)

*Does not become stiff, brittle, discolored, or show loss of grain

SPECIFICATIONS / TESTING / CERTIFICATION

Federal Specification:
 *CCC-408-D *Type II *Class A
 CFFA Specification:
 WA-101 *Type II *Class A
FIRE TESTING
 ASTM-E84 Tunnel Test Class A
 NFPA286 Corner Burn Test Class A
 EU Class Flame (EN 15102) Passed
 BS476 Part 6&7 Passed
 CAN/ULC-S102.2 Passed
 *WA Certified NSF/ANSI 342

*Meets or exceeds requirements for flame spread, smoke developments and flashover.
MOLD/MILDEW/BACTERIAL RESISTANCE
 ASTM-G21 Specifications:
 Passed all requirements of CCCW-408-D
 *Cadmium and Lead Free Formulation