



panoRama Walk & Wall

CONTINENTAL
GRAFIX

panoRama Walk&Wall

TEXTURED, NON-SLIP VINYL WITH REPOSITIONABLE ADHESIVE

panoRama Walk&Wall is the ultimate, one-step solution for indoor floors & walls, as well as sidewalk graphics! Designed for short- to medium-term, indoor & outdoor applications, Walk&Wall works great on carpet, tile, concrete, wood, stone, metal, glass and painted surfaces. Perfect for tradeshow, retail POP, wall murals, kids' rooms, man-caves, etc...

Repositionable, Dimensionally Stable & Durable.

APPLICATIONS

- tradeshow (carpet & wall graphics)
- POP (floor & wall graphics)
- doors, Walls & Floors of all sorts
- sidewalk graphics
- for short- to medium-term graphics

ADVANTAGES

- textured, Non-Slip vinyl with dimensionally stable fabric backing & repositionable adhesive
- no Lamination Required!
- slip Resistant (ASTM D-2047, ASTM C 1028-07 & R12 certified)
- sticks to almost any surface. (tile, glass, carpet, wood, metal, stone, painted surfaces, etc...)
- easy to install and remove, panels pull up in one piece.
- Repositionable & no adhesive residue.
- universal printability: UV-Curable, Solvent, Eco-Solvent, Latex inks



Information provided here is based on research and is believed to be reliable as of printing date. This information does not constitute a warranty. All material should be tested by purchaser to determine final suitability. Quality Media will not be held responsible for customers end use of product. Quality Media is available for directions and advice as to proper use and application of our products.



panoRama Walk & Wall

CONTINENTAL
GRAFIX

panoRama Walk & Wall

TEXTURED, NON-SLIP VINYL WITH REPOSITIONABLE ADHESIVE

MATERIAL

- textured Vinyl Surface with fabric backing
- Printable bright white front side
- Repositionable solvent acrylic adhesive
- 200 microns (8mil)
- 48"x82' rolls
- B1 & M1 fire certificates

LINER

Polyethylene coated paper

PRINTING METHOD

- digital
 - solvent, eco-solvent
 - UV curable inks
- latex
- screen printing

HUMIDITY AND SOLVENT RESISTANCE

Good. Resistant to mild acids, alkalis & salt solutions

MIN. APPLICATION TEMPERATURE

+10°C to +30°C (+50°F to +86°F)

SERVICE RANGE TEMPERATURE

+5°C to +40°C (+41°F to +104°F)

SHelf LIFE

12 months, stored at +20° C (68° F) and 50% R.H.

DURABILITY

Indoor Floor applications: 1-3 months (depending on traffic)
Indoor Wall applications: 24-36 months
Outdoor Sidewalk applications: 1-3 months
Clean removal with no adhesive residue.
*for critical substrates, please test prior to application


Printer Settings: For most printers, choose "generic self adhesive vinyl setting" for best results.

APPLICATION

Surface must be dry and clean. Apply with hard rubber roller to ensure adequate adhesion.

WARRANTY

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the Technical Specification Sheets. Continental Grafix will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. **The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specific applications.

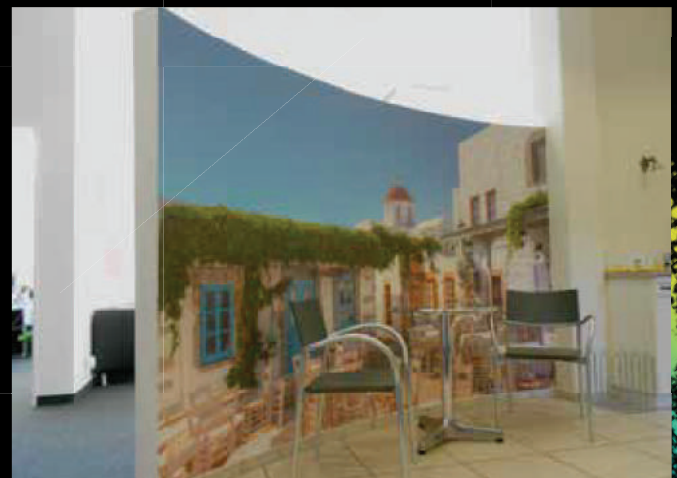

Information provided here is based on research and is believed to be reliable as of printing date. This information does not constitute a warranty. All material should be tested by purchaser to determine final suitability. Quality Media will not be held responsible for customers end use of product. Quality Media is available for directions and advice as to proper use and application of our products.