


ClassicVue® Perforated Film



ClassicVue®

Perforation pattern:

Approx. 50/50 (50% open)

Perforation size:

0.06 in. (1.5 mm)

Film:

8-mil calendared PVC on a 3-in. core

Standard roll sizes:

54 in. x 25 ft.


18, 36 & 54 in. x 100 & 1000 ft.

Application:

Vehicle window wraps, medium-format retail and commercial window signage

Product code:

CFEABW

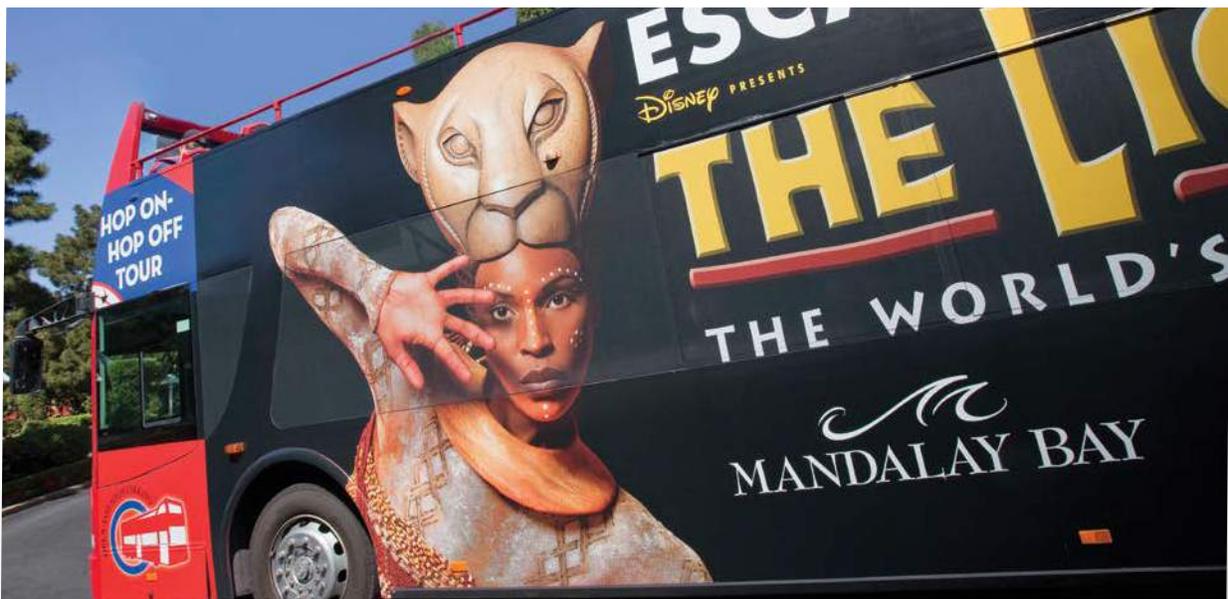

CLEAR FOCUS Imaging, Inc.

www.qmls.com 800/552-9427 info@qmls.com fax 203/281-6451

ClassicVue® Perforated Film



CLEAR FOCUS ClassicVue® FILM

Flexible Vinyl

Exterior Mount Product Specifications

Product Code: CFEABW

8-mil white/black composite PVC with clear removable acrylic pressure-sensitive adhesive and a release liner consisting of clear PET film laminated to perforated paper to absorb ink.

Applications	Windows, glass doors and other transparent surfaces.
Composition	White/black PVC laminate with clear pressure-sensitive adhesive coating and a release liner consisting of clear PET film laminated to perforated paper to absorb ink.
Open Area	50% (approx.)
Vinyl Thickness (incl. adhesive)	8 mils (.008 in./203 microns), approx.
Release Liner Thickness	7 mils (.007 in./178 microns), approx.
Adhesive Thickness	1 mil (.001 in./25 microns), approx.
Perforation Diameter	.060 in. (1.5 mm)
Standard Widths/Lengths	18, 36 & 54 in. x 100 & 1000 ft. (45.72, 91.44 & 137 cm x 30.48 m & 304.8 m) and 54 in. x 25 ft. (137 cm x 7.62 m) Custom sizes available by special order.
Dimensional Stability	Good
Minimum Application Temperature	40° F (4° C)
Service Temperature Range	0° F to 140° F (-17° C to 60° C)
Expected Lifetime Exterior	2 to 3 years. 6 months for clean removal. Adhesion may increase with time.
Water Resistance	Fair. Immersion in water not recommended. If exposed to rain, an optically clear, compatible overlamine can be used to prevent holes from filling with water.
Humidity Resistance	Fair
Solvent Resistance	Good
Storage Stability	1-year shelf life when stored at 70° F (21° C) and 50% relative humidity
Colors Available	White on print side and black on adhesive side.
Printing	Use standard vinyl inks. Print image on vinyl side, not on release liner. Compatible with screen printing; inkjet printing using solvent, eco-solvent, mild solvent, latex (with solid paper liner) and UV-cure inks; thermal transfer; electrostatic transfer; and airbrushing.
Application	Apply to clean, dry glass surface. Use mild soap and water, rinse and dry glass well. Do NOT use ammonia, Windex® or other solvent-based glass cleaner prior to application.
Removal	Remove by peeling from surface. Remove any adhesive residue on older installations, if necessary.

Other ClassicVue Products

ClassicVue with a White PET Liner
Code: CFEABWWL

Features a patented white PET liner consisting of white PET film laminated to perforated paper to absorb ink and to facilitate sensing of media by printer. Compatible with all printing methods listed above, except latex inks. Custom order.

ClassicVue with a Solid Paper Liner
Code: CFEABWLS

Features an unperforated solid paper liner. Recommended for latex inks. Not compatible with UV-cure printer. Custom order.

Information provided here is based on research and is believed to be reliable as of printing date. The information does not constitute a warranty. All material should be tested by purchaser to determine final suitability. Quality Media will not be held responsible for customers end use of product. Quality Media is available for directions and advice as to proper use and application of our products.

Subject to change without notice