



### panoRama Innova Clear

# CONTINENTAL

INNOVA CLEAR is a clear vinyl film with 80/20 perforation pattern. With only 20% removed area you get the very best image quality, maximum privacy and sunscreen while maintaining an excellent see-through level. Easy to install and remove and inside graphics have many advantages.

#### **APPLICATIONS**

- Shop windowsBuilding wraps
- Rear or side windows of busses
- Rear windows of cars

## ADVANTAGES of going INSIDE with INNOVA CLEAR 80/20!

- No Lamination! The window protects the graphic; they last much longer than outside mounted graphics
- No vandalism
- No permitsWork inside avoiding outside weather
- conditions, wind, cold, rain, and heat!
  Semi-permanent, clear adhesive offers good
- removability after long term application.

  Applied on the inside of the window, less need for lifts, ladders and blocking traffic.


  Suitable for printing with UV curable inks and
- screen printing.
- Maximum contrast and great visibility (due to perfect 80/20 perforation pattern).
- Up to 1 year durability warranty if applied under normal conditions.

www.cgxusa.com info@cgxusa.com

### panoRama Innova Clear

Inside-Mount Clear Self-Adhesive Window Perf



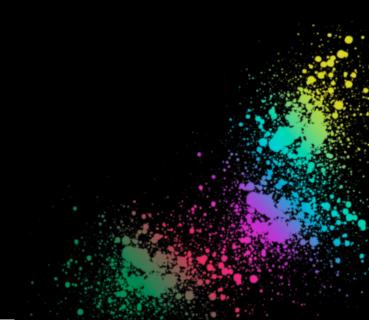





### panoRama Innova Clear



## panoRama Innova Clear

Inside-Mount Clear Self-Adhesive Window Perf

#### MATERIAL

- 150 microns (8mil) Clear Gloss VinylClear Removable Semi-permanent Adhesive
- Great dimensional stability

#### LINER

polyester liner

- 165 g/m2

#### OPEN AREA / PRINTABLE AREA

- open area: 20%
- printable area: 80%

#### **PRINTING METHOD**

- digital
  - solvent, eco-solvent
  - UV curable inks
- latex inks
- screen printing

#### **HUMIDITY AND SOLVENT RESISTANCE** good

### **APPLICATION TEMPERATURE**

+10°C to +30°C (+50°F to +86°F)

#### SERVICE RANGE TEMPERATURE

 $-17^{\circ}$ C to  $+50^{\circ}$ C ( $+0^{\circ}$ F to  $+122^{\circ}$ F)

1 year, stored at +15 to  $+20^{\circ}$  C (59 to  $68^{\circ}$  F) 45% and 65%. and relative humidity between

#### **DURABILITY**

Up to 6 months in mid European conditions. Not to be applied on: fresh paint or ink, polycarbonate, certain PVC (no exhaustive list). For critical substrates, please test prior to application.

www.cgxusa.com info@cgxusa.com

#### PRINTING METHOD

Screen print mirror image then spot white and spot black. Digital printing with solvent ink then spot white and spot black screen printing. See our technical information for best printing results.

#### **APPLICATION**

Prevent from contact with solvent or ammonia based cleaner Clean window with soap and water. Rinse and dry glass after cleaning. ALWAYS clean and dry glass prior to application. Please respect our application instructions.

